

LogiLink®




Audio Converter

Digital (Toslink/Coaxial) to
Analog (2RCA)

Art. No.: CA0101

Converts digital Coaxial or Toslink audio signals to analog L/R audio.

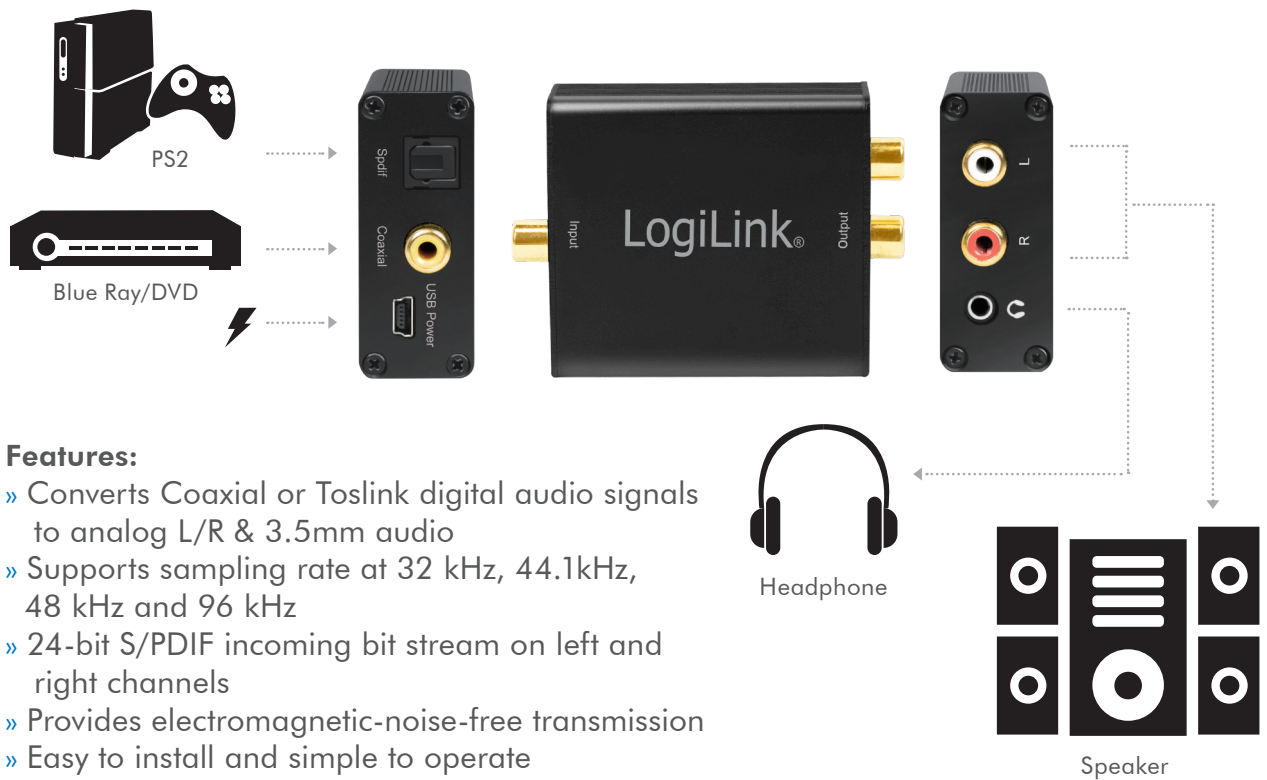

Features:

- » Converts Coaxial or Toslink digital audio signals to analog L/R & 3.5mm audio
- » Supports sampling rate at 32 kHz, 44.1kHz, 48 kHz and 96 kHz
- » 24-bit S/PDIF incoming bit stream on left and right channels
- » Provides electromagnetic-noise-free transmission
- » Easy to install and simple to operate

Specification:

Audio Input Connector	Toslink, 1 x RCA (Coaxial)
Audio Output Connector	2 x RCA (R/L), 1 x 3.5mm jack
Sampling Rate	32 kHz, 44.1 kHz, 48 kHz and 96 kHz
Operating Temperature	0°C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



LogiLink®



Audio Converter

Digital (Toslink/Coaxial) to
Analog (2RCA)

Art. No.: CA0101

Storage Humidity	5% to 90 % RH (no condensation)
External Power Supply	DC 5.0V/1.0A
Power Consumption	0.5 Watts (max)
Product Dimensions	73(L) x 54(W) x 20(H)mm
Product Weight	65g



Package Contents:

- » 1 x Audio Converter
- » 1 x Power Supply
- » 1 x User Manual

Package Informations:

- » Packing Dimension: 149 x 110 x 40mm
- » Packing Weight: 0.18kg
- » Carton Dimension: 575 x 235 x 340mm
- » Carton Q'ty: 50pcs
- » Carton Weight: 9.8kg



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



CA0101 v.2.0
4 052792 044805
Made in China