


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

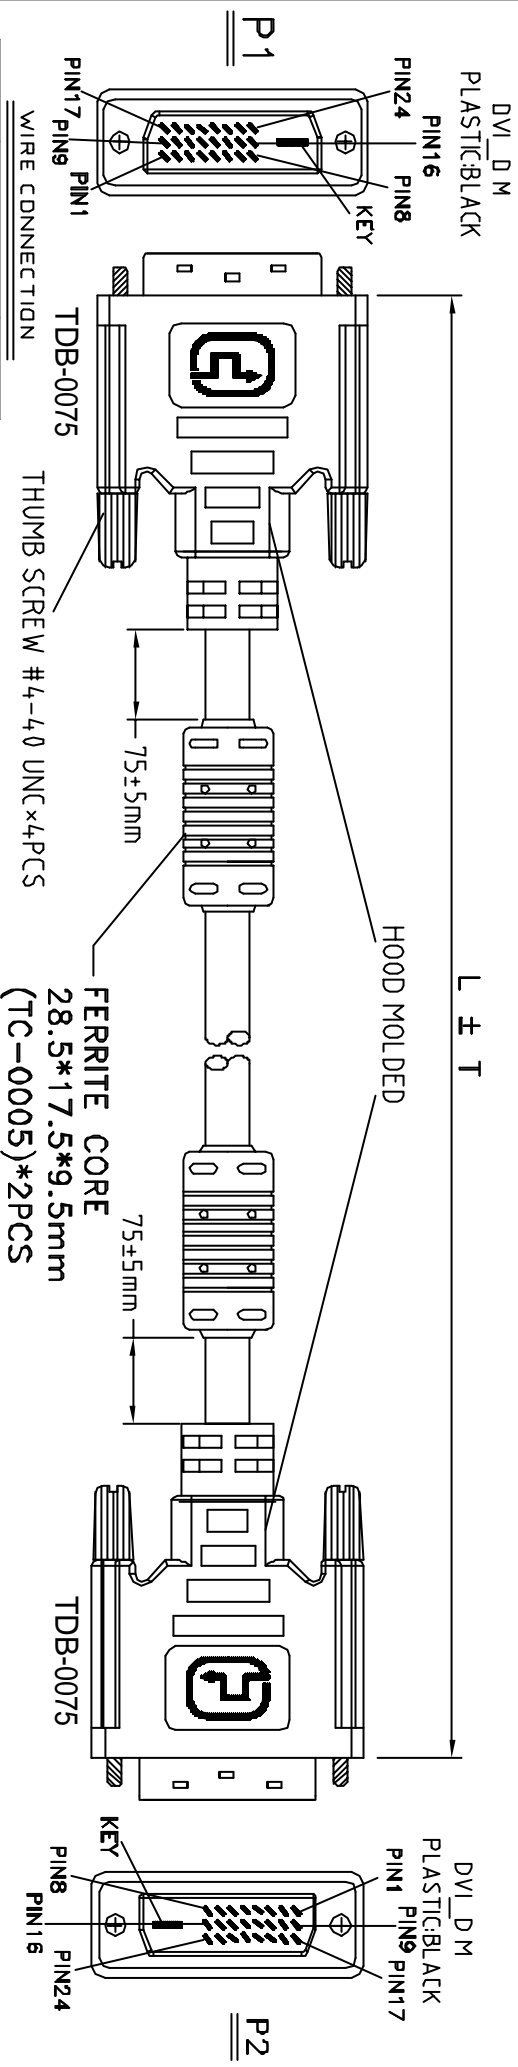

REMARK:

1. CABLE:[28AWG17/0.127]*1P+DRAIN WIRE+AL/MYLAR]*7C+28AWG17/0.127]*1*3C +AL/MYLAR+BRAID SHIELDS+JACKET:PVC DD: 8.6±0.15mm UL20276 APPROVED. COLOR:BLACKINK-K01
- 2.CONNECTOR:
P1&P2:DVI_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- 3.SHIELD: P1&P2 COPPER FOIL 360° SOLDERED T0 CONNECTOR SHELL & CABLE SHIELDING
- 4.HOOD:
P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACKINK-K01
- 5.TEST REQUEST:
|1| 100% SHORT OPEN & MIS WIRE TEST.
|2| CONTACT RESISTANCE 3 OHMS MAX.
|3| INSULATION RESISTANCE 10M OHMS MIN.
|4| HI-POT VOLTAGE: 300V DC.
6.PACKING: <1>-EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL
<2>-EACH CARTON / ROHS LABEL L*W=35*22mm

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

200-0482-3	CD0003	5000	50	4260113560112
200-0482-2	CD0002	3000	30	4260113560105
200-0482-1	CD0001	2000	30	4260113560099
DWG	P/N	L [mm]	T [mm]	EAN CODE

Tolerance	h1h	M/M
.X	.15	.31
.XX	.11	.10
.XXX	.115	.15

2DIRECT GMBH
 Title: DVI_D - DVI_D DUAL LINK CABLE
 Customer P/N:

Drawn: FANNIE 04/14/06	Customer P/N
Check:	App'd
Engr:	Scale: NONE
	Units: m/m
	Third Angle Projection
Dwg No. 200-0482	REV: A
	Sheet 1/2