



Toolless Cat. 6A RJ45 Plug, UTP

Part no.: MP0045

Technical Features

Field assembly Cat.6A plug, unshielded

Solid or stranded wire AWG 22–AWG 26



Insulated wire diameter from 0.98–1.5 mm

Cable jacket diameter from 6.0–9.5 mm

Tool-free termination, reusable

Including cable boot, cap and wire guide plate

Technical Drawings

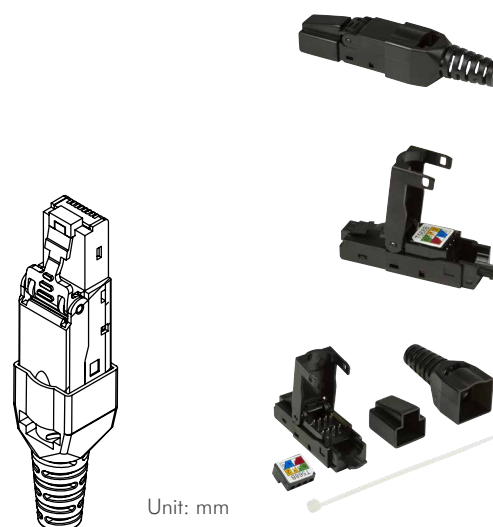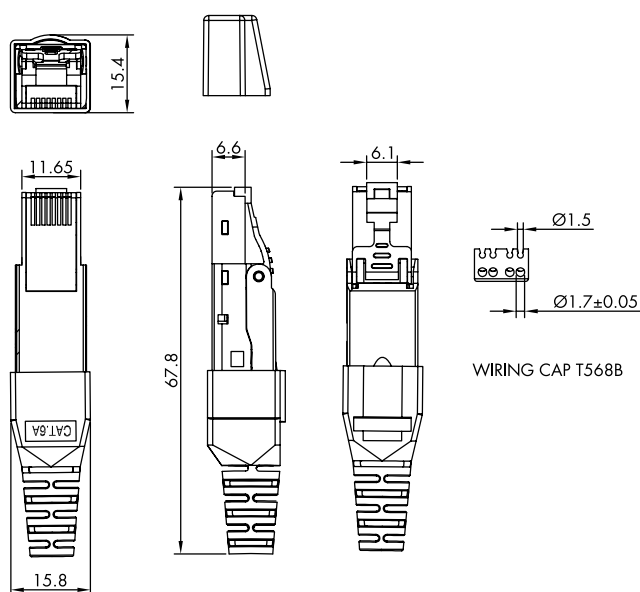

Unit: mm

MP0045



4 052792 045987

Made in China

www.2direct.de




RoHS
compliant




*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

- ① Remove the Cable tie before installation.

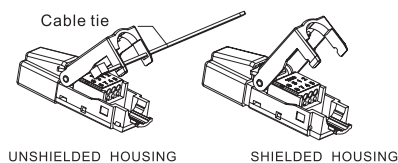


- ② Insert cable into strain relief boot, strip off 1.2 inch of cable jacket, fold back braid and drain wire.




Boot adjustment


Cut the end of boot to fit your cable OD.




- ③ Fan out all four twisted pairs, following the color coding label and allocate each conductor into proper slots on wiring cap. Trim the ends of conductors.

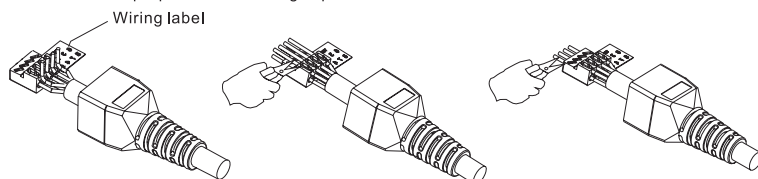


- ④ Place wiring cap on plug.



- ⑤ Place the wiring cap onto plug, use plier to clamp wiring cap until it completely snap-in to effect the connection.

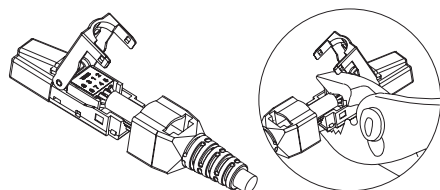


- ⑥ Close plug cover, make sure the drain wire is in proper contact with grounding clip on plug. Pull back strain relief boot to cover the plug, fasten supplied cable tie to secure grounding contact.

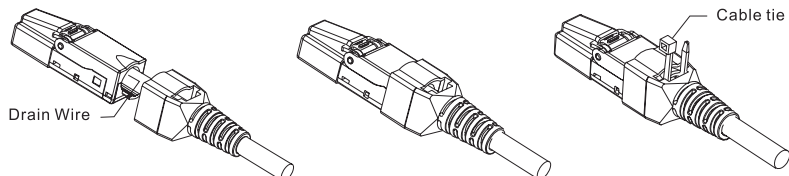

Unload the cable

Cut off cable tie, remove the boot. Using flat screw driver and pry gently on plug cover one end first and the other end subsequently to open it.

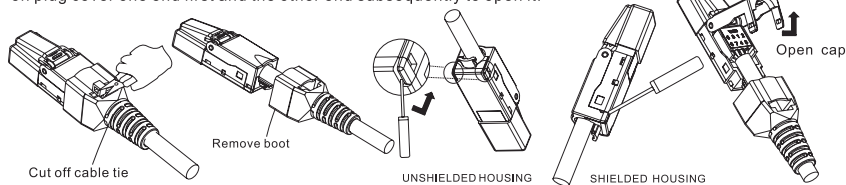

Package Contents

1x Toolless Cat. 6A RJ45 Plug, UTP
1x User Manual

Packaging Informations

Packing Dimension	140x90x20 mm
Packing Weight	0.015 kg
Carton Dimension	450x420x263 mm
Carton Q'ty	500 pcs
Carton Weight	8.6 kg

MP0045



4 052792 045987

Made in China



www.2direct.de



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.