

## Cat.6A Keystone Jack STP, 180°, Toolless, Standard Type

Art no.: NK4001

### Technical Features

Cat.6A Class EA, 500 MHz, 10 Gigabit Ethernet

ISO/IEC 11801, DIN EN 50173-1, TIA/EIA 568-C.2 and IEC 60603-7-51 Ed.1


AWG 22–24, suitable for cable Ø5–8 mm

Strain relief with 360° shielding support

Fully shielded diecast housing

Suitable for PoE, PoE+ and PoE++ applications

### Technical Drawing

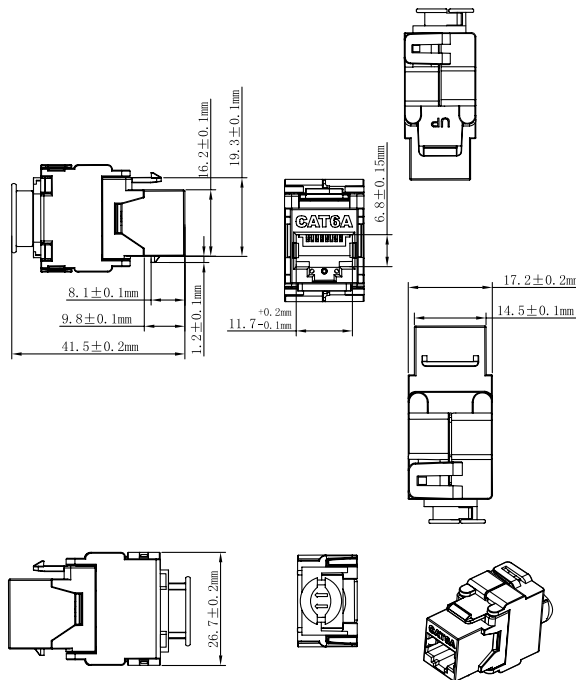

#### Electrical:

1. Contact Resistance: 20M Ohms max.
2. Insulation Resistance: 500M Ohms min. @500 V DC
3. Withstand Voltage: DC 1000 V AC 700 V RMS 60 Hz, 1 min

#### Environmental:

1. Storage Temperature: -40°–70°
2. Operation Temperature: -10°–60°

#### Mechanical:

1. Shield Material: Zinc Alloy
2. IDC Material: PC Terminal: Phosphor Bronze, Tin Plating
3. RJ45 Contact Life: 750 times min.
4. IDN Life: 250 times min.
5. RJ45 Dimension: 11,9 x 9,8 mm

NK4001



4 052792 026818

Made in China

www.2direct.de




\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

## Package Content

1x Cat.6A Keystone Jack STP, 180°, Toolless, Standard Type

## Packaging Information

Packing Dimension	120 x 80 mm
Packing Weight	0,036 kg
Carton Dimension	530 x 320 x 230 mm
Carton Q'ty	250 pcs
Carton Weight	10,6 kg

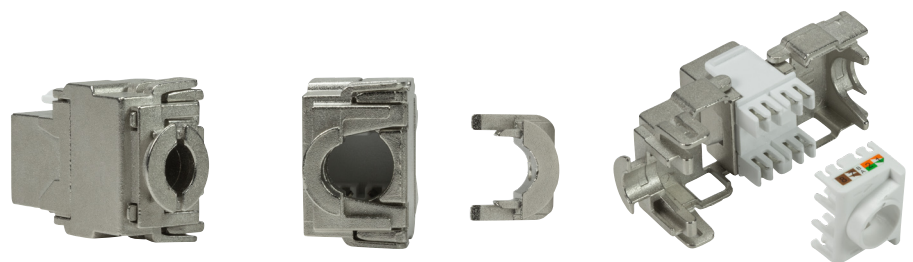

NK4001



4 052792 026818

Made in China

[www.2direct.de](http://www.2direct.de)



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.